



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :	A1	(11) International Publication Number: WO 00/17738
G06F 3/00, 3/033, H04B 1/20		(43) International Publication Date: 30 March 2000 (30.03.00)


(21) International Application Number: PCT/EP99/06571	(81) Designated States: BR, CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 7 September 1999 (07.09.99)	Published <i>With international search report.</i>
(30) Priority Data: 60/100,826 17 September 1998 (17.09.98) US 09/311,128 13 May 1999 (13.05.99) US	
(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).	
(72) Inventor: KEMINK, Joost; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).	
(74) Agent: HOEKSTRA, Jelle; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).	

(54) Title: INTERNET-BASED SERVICE FOR UPDATING A PROGRAMMABLE CONTROL DEVICE

(57) Abstract

An Internet based service is provided for updating a programmable control device. An Internet site contains links to appliance-dependent control and feature option information which can be downloaded to the programmable control as a graphic user interface (GUI). A user interface is provided at the site for the user to easily specify a target appliance, and thereafter selectively download the interface and control information that is available for the target appliance. The Internet site also contains links to other providers of configurations and macros, such as system integrators who provide interfaces based on an inventory of the user's controllable equipment, hobbyist who share configurations and macros that they've found useful, and so on.

*playback
Feb 4, 2002
FEB 19, 2002*

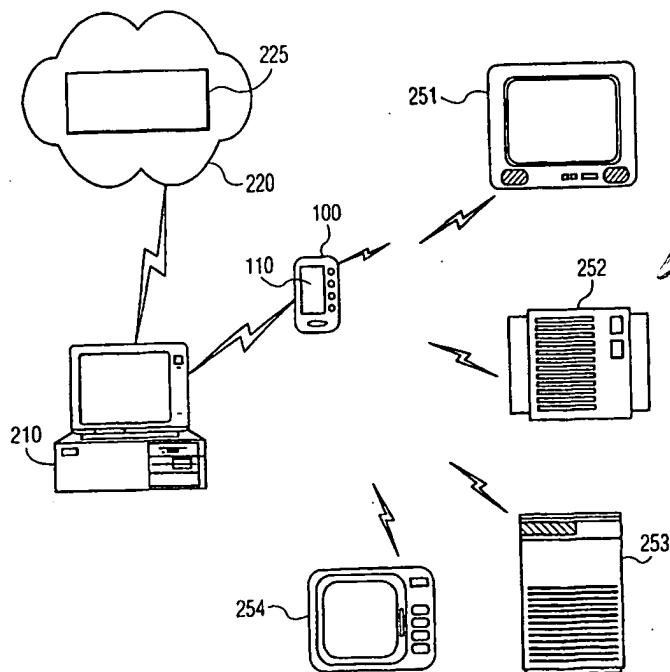

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Internet-based service for updating a programmable control device.

This application claims the benefit of U.S. Provisional Application No. 60/100,826, filed 09/17/98, Attorney Docket PHA 23,501 P.

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

This invention relates to the field of consumer electronics, and in particular to devices having a programmable graphics user interface, such as programmable remote control devices, telephones, household appliances, and the like.

2. Description of Related Art

10 Ever increasingly more sophisticated electronic audio/video (AV) equipment and home automation equipment are being introduced on the consumer electronics (CE) market. Typically, the equipment is programmable by the end-user in order to tailor the numerous functionalities and settings to the individual preferences. The user-interactivity and synergy aspects of the equipment are determined substantially by software such as interactive applications, control software and user interfaces. See, for example, the HAVi architecture and 15 the Home API initiative, both involving substantial contributions from Philips Electronics, the Jini technology of Sun Microsystems, Inc., etc.

20 A step forward in user-friendliness regarding interacting with the equipment is the universal programmable remote controller, such as the "RC-2000" of Marantz and the "Pronto" made by Philips Electronics. The term "universal remote" refers to a device that enables the end-user to control the majority of his/her collection of remotely controllable apparatus, regardless of the type or brand of the individual apparatus. This universal controllability is achieved by accommodating on the remote a data base of multiple sets of existing control (IR or RF) codes, each particular set being associated with a particular type of 25 apparatus of a particular brand. In addition, the universal remote is programmable to learn or adopt new codes and to associate them with a particular user-defined input. The "Pronto", for example, has built-in RC-5 and RC-6 codes for Philips and Marantz equipment, IR-sending and IR-learning eyes, and an RS232 serial port connector for after-market expandability, e.g., via a PC.

As the advantages of programmable control are realized, the market demand for programmable control can be expected to result in programmable graphic user interfaces on devices other than remote controllers. For example, consumers may find that the conventional numeric key pad on a telephone device is antiquated in light of new communications means and dialing options provided by their communications service provider. Some consumers may prefer only two options to appear on their washing machine: "white wash" or "color wash", wherein each selectable option is preprogrammed to provide the appropriate wash duration, water temperature, cool down cycle, and so on. In like manner, common settings for a microwave oven can be preprogrammed and presented on a control panel that is customized for a particular user.

OBJECT OF THE INVENTION

The customization capability of programmable user interfaces raises the issue of user-friendliness regarding controllability, reliability and accessibility, as well as the user-friendliness of the user-programmability. How technically sophisticated the equipment may be, it will be of little use to the consumer if he/she cannot get it to do what he/she wants it to do and when he/she wants it be done.

FIG. 1 illustrates an example programmable remote control 100 similar to the "Pronto". The remote control 100 provides a graphic user interface (GUI) via an LCD touch screen 110 and also has direct-access buttons 120 for frequently used control functions. Typically, the remote control 100 includes customizable device templates for full control of the device being controlled. For example, the remote control 100 comprises one or more templates for the GUI that contains illustrations or icons of the controls typically found on a playback device such as a DVD, including a play button icon 131, fast forward 132, go to end 133, stop 134, and so on. The user merely touches the icon 131-134 on the LCD touch screen 110 to effect the desired function. Also illustrated on the LCD touch screen 110 is an icon 141 to switch to another related device, such as a TV, and an icon 142 to switch to an index of controllable devices and function.

An advanced programmable remote control 100 such as the "Pronto" also provides options to assign control functions to icons or buttons; options to delete and create icons or buttons; to program and edit macros; a keyboard with soft keys for (re-) labeling buttons, icons and templates or the GUI's control panels. For example, a user may desire some of the control options for the television, such as volume control, to be displayed on the LCD touch screen 110 whenever the controls 131-134 of the example DVD are displayed. Different

users of the control device 100 in the same household may each prefer a different layout for the same device. To accommodate such preferences, programmable control devices such as the "Pronto" are highly customizable in terms of the lay-out, appearance, labeling, organization and in terms of programming and editing the control functions. As the use of graphic user interfaces becomes commonplace, the availability of programmable graphic user interfaces on other devices, such as telephones, hand-held radios, household appliances, navigation devices, and so on, can be expected to also become commonplace.

An ergonomically designed programmable control, such as the "Pronto" remote controller for example, may help to lower the acceptance-threshold for home theater and home automation systems, owing to the controller's user-friendliness, personalizing options and wide applicability, but many capabilities of the programmable control system may go unused if the consumer is reluctant to program the device, or if the programming of the device is perceived as a daunting task. Similarly, the synergistic aspects of a programmable control system may also go unused if the user is not aware of, or sensitive to, the possibility of such synergy. That is, a cluster of appliances may be synergistically controlled so as to enhance a sense of being embedded in the experience. The playback of a DVD movie, for example, may be enhanced by enabling surround sound on the user's audio appliance, dimming the lights in the room where the user's television is located, and placing the user's telephone in an auto-answer mode.

The capabilities of the programmable control system may also go unused if the capabilities of the device being controlled, herein termed the appliance, are difficult to obtain or the commands that effect the control of the appliance are difficult to map to the available capabilities of the programmable control. To ease the programming task, the Pronto system includes an infrared (IR) receiver that receives the appliance commands from a remote control device that is specific to the appliance. This feature, however, presupposes that an appliance-specific remote control device will continue to be provided with each remotely controllable appliance. As programmable remote controls such as Pronto become prolific, the need for packaging an appliance-specific remote control device with each appliance becomes questionable. As is becoming increasingly common, the appliance-specific remote control devices are typically used once by the consumer to program a common programmable remote control, then stored or tossed away.

As noted above, the programmable control device exemplified by Pronto includes a configuration capability, wherein the user-interface is designed for all the

appliance-specific controls, macro groups, GUI panel layouts, button appearances and behaviors, and so on.

Copending U.S. patent application "FULLY FUNCTIONAL REMOTE CONTROL EDITOR AND EMULATOR", U.S. serial no 09/271,200, Attorney Docket PHA 5 23,607, filed 3/17/99 for Jan van Ee, and incorporated by reference herein, points out the difficulty of developing an effective configuration, particularly when the only means for testing and verifying the configuration is to actually apply the configuration to the device. This referenced application discloses the use of an editor and emulator to develop and test configurations and command sequences on a personal computer, for subsequent download to 10 the programmable control device after the configuration is verified, via emulation. It is expected that the use of this referenced invention will result in a rapid development of many useful appliance-specific macros. As programmable remote devices such as "Pronto" become 15 increasingly popular, manufacturers are likely to develop macros and Graphic user interfaces that enhance the ease of use of their products, the appeal of their products, and, through interaction with other devices, enhance the apparent capabilities of their products. In like manner, as programmable control is provided for devices other than remote control devices, such as telephones, household appliances, and the like, it is expected that the vendors of these devices will provide optional appliance-specific macros and configurations as well.

It is an object of this invention to ease the task of programming a programmable 20 control device, and in particular a device having a graphic user interface. It is a further object of this invention to provide a means for accessing and downloading graphic user interfaces corresponding to appliances that are included in a user's inventory of controllable appliances. It is a further object of this invention to provide a means for accessing and downloading 25 graphic user interfaces that provides for the synergistic control of the user's inventory of controllable appliances.

BRIEF SUMMARY OF THE INVENTION

These objects and others are achieved by providing an Internet based service for updating the graphic user interface of a programmable control device. An Internet site contains 30 links to appliance-dependent control and feature option information which can be downloaded to the programmable control as a graphic user interface (GUI). The graphic user interface includes, for example, selectable buttons, icons, clusters of icons, templates, and the like that enhance the control of one or more user appliances. The Internet site allows the user to easily specify a target appliance, or collection of appliances, and thereafter selectively download one

or more graphic user interfaces that are available for the target appliance, the collection of appliances, or an environment that includes one or more of the appliances. The Internet site also contains links to other providers of graphic user interfaces, such as system integrators who provide configurations and macros based on an inventory of the user's controllable equipment, hobbyist who share configurations and macros that they've found useful, and so on.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is explained in further detail, and by way of example, with reference to the accompanying drawings wherein:

FIG. 1 illustrates an example prior art programmable remote control device.

FIG. 2 illustrates an example block diagram of an Internet-based service for updating a programmable control device in accordance with this invention.

FIG. 3 illustrates an example flow diagram of an Internet-based service for updating a programmable control device in accordance with this invention.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 2 illustrates an example block diagram of an Internet-based service for updating a programmable control device 100 in accordance with this invention. The paradigm of a programmable remote control device 100 is used herein for ease of understanding. As would be evident to one of ordinary skill in the art, the principles embodied herein are applicable to other control devices, such as telephones and other household appliances having a programmable control interface. A user (not shown) accesses the Internet 220 via an Internet access device 210, such as a personal computer (PC). As would be evident to one of ordinary skill in the art, Internet access devices are currently available in other forms, such as set-top boxes, handheld computers, cellular telephones, and the like, and can be expected to migrate to other devices as well, including the control device 100. FIG. 2 also illustrates a variety of appliances 251-254 that are potentially controllable by the remote control device 100; the Internet access device 210 may be included in one or more of the appliances 251-254 as well. As noted above, the programmable control interface may also be located on the appliance 251-254, the paradigm of a remote control being used herein for ease of understanding.

In accordance with this invention, an Internet site 225 provides a service for obtaining software code for programming the graphic user interface of the control device 100. The software code will generally contain information specific to one or more of the appliances 251-254, but may also contain general purpose information as well, such as code for

organizing and presenting information on the display screen 110. The term device control profile is used herein to identify the nature of the graphic user interface, for ease of reference, although the profile or code need not be appliance specific. The software code is downloaded and stored at the control device 100, via the Internet access device 210; it may also be stored at the Internet access device 210 for subsequent or interim loading to the control device 100.

After receiving the device control profile, the control device 100 is able to display the graphic user interface corresponding to the profile. If the profile is appliance specific, the appliance commands to effect the control illustrated by the graphic user interface may also be communicated to the control device 100, to facilitate control of the appliance 251-254 or appliances corresponding to the downloaded code, as discussed with regard to FIG. 1. For example, the service at the Internet site 225 will display, via the Internet Access device 210, a list of appliances that have corresponding graphic user interface code, and prompt the user for a selection. As is common in the art, the user may be led through a sequence of links and web pages until a manufacturer's model number is found that corresponds, for example, to the television 251 in FIG. 2. The user may also be presented a plurality of graphic user interfaces corresponding to the selected appliance and is given a choice among them. The selected graphic interface code is thereafter downloaded to the control device 100. Ancillary information may also be downloaded. For example, in the example of a remote control device 100 such as the "Pronto", the sequence used by the infrared transmitter of the remote control device 100 to effect each appliance control may also be downloaded.

The Internet site 225, or sites, may be provided by the vendor of a remote control device 100, to provide added perceived value to its product; or by one or more vendors of the appliances 251-254 that can be controlled by the remote control device or by a control device contained within the appliance, to provide added perceived value and ease of use to their products; or by a third party that provides the service in return for revenue from advertisers on the site. Particularly in the case of appliance vendors and third parties, the site 225 may provide differing versions of code corresponding to the device control profile, depending upon the type of control device 100. That is, for example, different remote control device manufacturers may employ different commands and protocols to program their remote control devices, or different models of control devices from the same manufacturer may have different characteristics and capabilities. In a preferred embodiment, the site 225 is configured to provide the appropriate code to the particular model of control device 100. As would be evident to one of ordinary skill in the art, although the Internet site 225 is illustrated in FIG. 2

as a single site, the site 225 will typically include links to multiple other sites, such as vendor-specific sites, system-integrator sites, and the like.

FIG. 3 illustrates an example flow diagram of an Internet-based service for updating a programmable control device in accordance with this invention. Illustrated in FIG.

5 3 is an optional block 310 for determining a user profile. Copending U.S. patent application "CUSTOMIZED UPGRADING OF INTERNET-ENABLED DEVICES BASED ON USER-PROFILE", U.S. serial number 09/160,490, filed 9/25/98 for Adrian Turner et al., Attorney docket PHA 23,500, presents a server system that maintains a user profile of a particular end-user of consumer electronics network-enabled equipment, and a data base of 10 new technical features for this equipment, and is incorporated by reference herein. Copending U.S. patent application, "UPGRADING OF SYNERGETIC ASPECTS OF HOME NETWORKS", U.S. serial number 09/189,535, filed 11/10/98 for Yevgeniy Shteyn, Attorney docket PHA 23,527, incorporated by reference herein, presents a system with a server that has access to an inventory of devices and capabilities on a user's home network. The inventory is, 15 for example, a look-up service as provided by HA Vi, JINI and Home API architectures. The server also has access to a data base with information of features for a network. The server determines if the synergy of the apparatus present on the user's network can be enhanced based on the listing of the inventory and on the user's profile. If there are features that are relevant to the synergy, based on these criteria, the user is notified. In accordance with this invention, upon notification of newly added features, or the potential for synergistic enhancement, the user is provided the option to select and download graphic user interfaces related to these new features and enhancements.

Using the techniques presented in the aforementioned copending applications, or other techniques common in the art, such as an interactive query session, the options 20 presented to the user at block 320 can be customized for the particular user. Differing graphic user interfaces may also be provided in dependence upon demographics. For example, the GUI code may differ for the same appliance in dependence upon the age of the user. Alternatively, if a user profile is not provided, block 320 is configured to present all of the options for 25 downloading graphic user interface code from the Internet. Using techniques common in the art, discussed above, the service in accordance with this invention determines the graphic user interface code suitable to the user's request and suitable to the user's particular control device. Illustrated in FIG. 3, the selection sequence is typically effected by a determination of a 30 particular appliance, at 330, and thereafter a determination of the corresponding GUI code, at 340. As noted above, the graphic user interface code is not necessarily limited to appliance

*Conc de journal
or auto op
or op enetwrk
choose option*

*Age of user
P27, P30*

specific code, and alternative means for determining the appropriate GUI code corresponding to the user's desires will be evident to one of ordinary skill in the art in the light of this disclosure.

Illustrated in FIG. 3 is optional block 350 that communicates the GUI code to the Internet access device, prior to downloading to the control device, at 370. Depending upon the configuration of the Internet access device, the GUI code may be downloaded to the Internet access device, and then transferred to the control device, or the GUI code may be routed directly to the control device. Block 360 is an optional block that facilitates a user modification of the GUI code prior to downloading to the control device, at 370. In this optional embodiment, the user may, for example, choose a different layout of the icons that are included in the GUI code, or choose to delete some of the icons, or choose to combine the downloaded GUI code with other GUI code. The aforementioned copending U.S. patent application "FULLY FUNCTIONAL REMOTE CONTROL EDITOR AND EMULATOR", U.S. serial no 09/271,200, Attorney Docket PHA 23,607, filed 3/17/99 for Jan van Ee, is utilized in a preferred embodiment to effect and verify such changes. Alternatively, the GUI code may be modified on the control device, using for example the techniques presented in copending U.S. patent application "GUI OF REMOTE CONTROL FACILITATES USER-FRIENDLY EDITING OF MACROS", U.S. serial number 09/129,300, filed 8/5/98 for Jan van Ee, Attorney docket PHA 23,470, and incorporated by reference herein.

The user is also provided the option of repeating the above sequence for additional downloads of GUI code, as indicated by the dashed line to block 310. After the GUI code is downloaded to the control device, at 370, the user may utilize the GUI corresponding to the code to control the selected appliance. As discussed above, the download process may also include a download of other information related to a remote control device and/or the selected appliance.

The foregoing merely illustrates the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements which, although not explicitly described or shown herein, embody the principles of the invention and are thus within its spirit and scope. For example, the choice of GUI code for a particular appliance may be dependent upon an inventory of other appliances of the user, or it may be dependent upon the location of the appliance, or the location of the control device. For example, the controls included in the GUI for a DVD player may differ depending upon whether the DVD is used with a conventional television or a high definition television. In like manner the controls included in the GUI for a television may depend upon whether the

television is incorporated into a multimedia system, or located in a bedroom, as compared to a family room, and so on. Copending U.S. patent application "REMOTE CONTROL DEVICE WITH LOCATION DEPENDENT INTERFACE", U.S. serial number 09/210,416, filed 12/11/98 for Joost Kermink, Attorney docket number PHA 23,522, discloses the use of a 5 location determination device to select or modify the user interface in dependence upon the location of a remote control device, and is incorporated by reference herein. In like manner, the controls included in the GUI may differ depending upon the geographic location of the user, using, for example, different language text in different countries. The controls may also be dependent upon a time parameter, such as the time of day, season of the year, and so on.

10 The structure and configuration are presented in the figures for illustrative purposes, and alternative arrangements would be evident to one of ordinary skill in the art. For example, the aforementioned GUI editing and verification tasks could be effected at the Internet site 225, rather than local to the Internet access device 210 or control device 110. In like manner, the Internet site 225 may provide the GUI information in the form of parametric 15 data, wherein the Internet access device 210 or control device 110 is configured to process the downloaded parametric GUI data to create the corresponding GUI details. For the purposes of this invention, it would be evident to one of ordinary skill in the art that the term GUI code includes such parametric GUI data. In like manner, the control device 110 may upload GUI code, in the form of GUI details, parametric GUI data, and the like, to the Internet access 20 device 210, for processing and modification by the Internet access device 210 based upon downloaded GUI code from the Internet site 225. It is also noted that other devices and systems that perform similar functions could be employed to effect this invention. For example, the use of an Internet site 225 in this disclosure is a paradigm for a general source of information. Other local networks, private networks, and the like could be used to store GUI 25 information at an accessible site, such as a server, for downloading to individual control devices having access to that site. These and other alternative architectures and configurations will be evident to one of ordinary skill in the art, and are included within the scope of the following claims.

CLAIMS:

1. A method to facilitate a programming of a control device (100) that comprises a graphics user interface, the method comprising:

enabling a determination of at least one appliance (251) for being user-controlled through the control device (100);

5 determining code for graphically representing a controllable feature (131) of the appliance (251) on the graphic user interface of the control device (100); and

communicating the code to the control device (100) for storage at the control device (100) for enabling user-control of the appliance (251) in response to a subsequent user activation of the control device (100).

10

2. The method of claim 1, wherein determining the code includes accessing an Internet site (225) in dependence upon the determination of the appliance (251).

15 3.

The method of claim 1, wherein determining the code includes extracting a

device control profile from a plurality of device control profiles.

4.

The method of claim 1, wherein determining the code includes extracting a device control profile in dependence upon at least one of: a location parameter, a time parameter, a user profile, and an appliance inventory.

20

5.

The method of claim 1, further including:

communicating appliance control commands to the control device (100) to facilitate the user-control of the appliance (251).

25 6.

The method of claim 1, further including enabling an editing of the code.

7.

The method of claim 1, wherein the determination of the at least one appliance (251) includes

providing a sequence of selection options that lead to the determination of the at least one appliance (251).

8. A software program that is contained in a computer readable medium for execution on a computer (210), the software program comprising:
 - a means for communicating to a control device (100),
 - a means for communicating to an Internet site (225),
 - a means for identifying a selected GUI code via the Internet site (225), and
 - a downloader that receives the selected GUI code from the Internet site (225)
- 10 via the means for communicating to the Internet site (225) and communicates the selected GUI code to the control device (100) via the means for communicating to the control device (100) for storage at the control device (100).
9. The software program of claim 8, further including:
 - 15 a means for modifying the selected GUI code.
10. The software program of claim 8, wherein the means for identifying a selected GUI code includes an identification of a selected appliance (251).
- 20 11. A control device (100) comprising:
 - a programmable user interface, and
 - a receiver that receives user interface code from an Internet site (225),wherein a programming of the programmable user interface is facilitated by the user interface code.
- 25 12. The control device (100) of claim 11, further including an Internet access device (210).
13. A software object that is contained in a computer readable medium at an Internet site (225) for execution on a control device (100), the software object comprising a code for generating a graphic user interface on the control device (100) when downloaded to the control device (100), wherein the graphic user interface facilitates the control of an appliance (251).

14. The software program of claim 13, wherein the graphic user interface is designed for at least one of: a remote control device (100), a telephone, and a household appliance (251).

5 15. A method of enabling a user to personalize control of an appliance (251), the method comprising:

enabling the user to contact a server via a communications network,

enabling the user to specify via the server a preference with regard to a control of the appliance (251),

10 enabling the server to provide a graphic user interface for a control device (100) for the appliance (251) based on the preference.

16. The method of claim 15, wherein

the server is enabled to provide the graphic user interface via the

15 communications network.

17. The method of claim 16, wherein the communications network is the Internet.

1/3

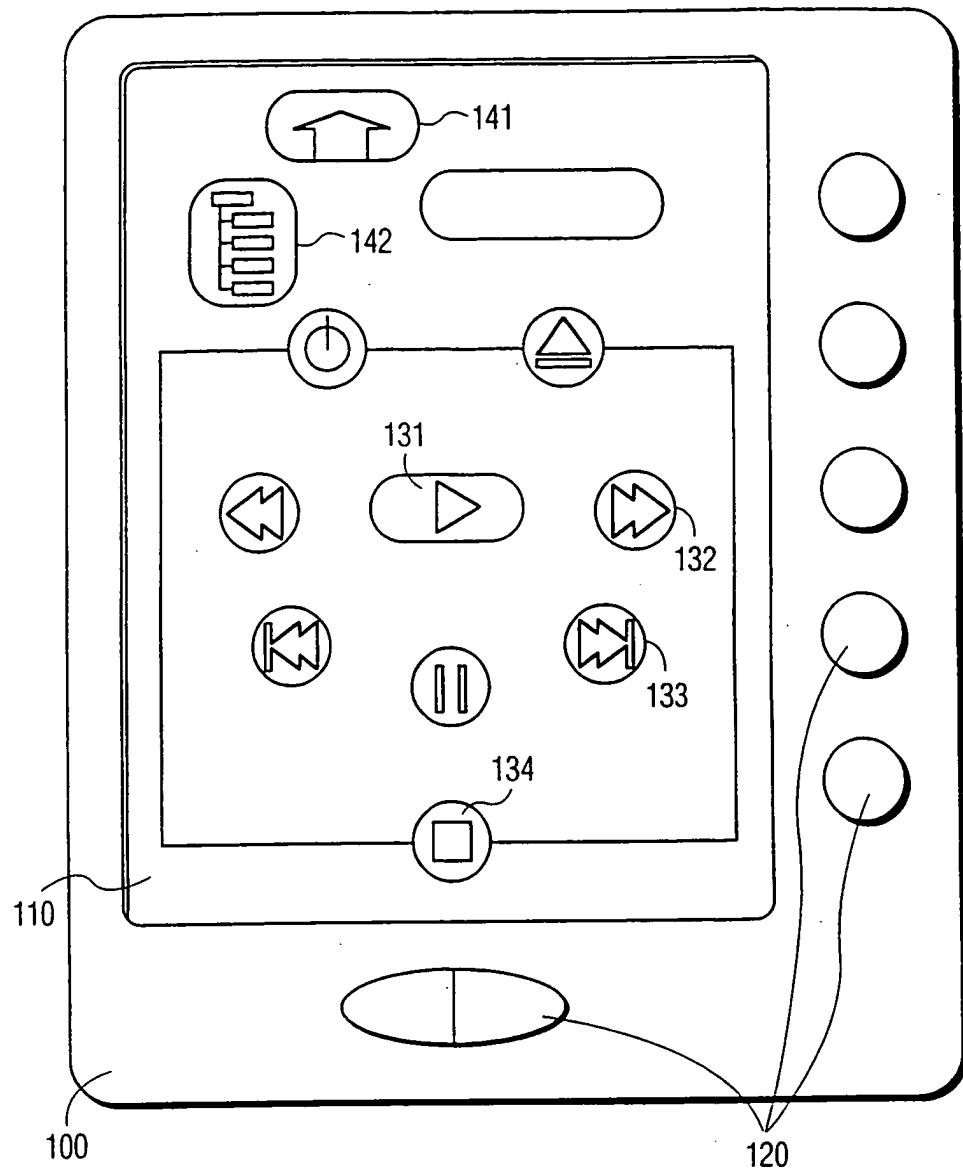


FIG. 1

2/3

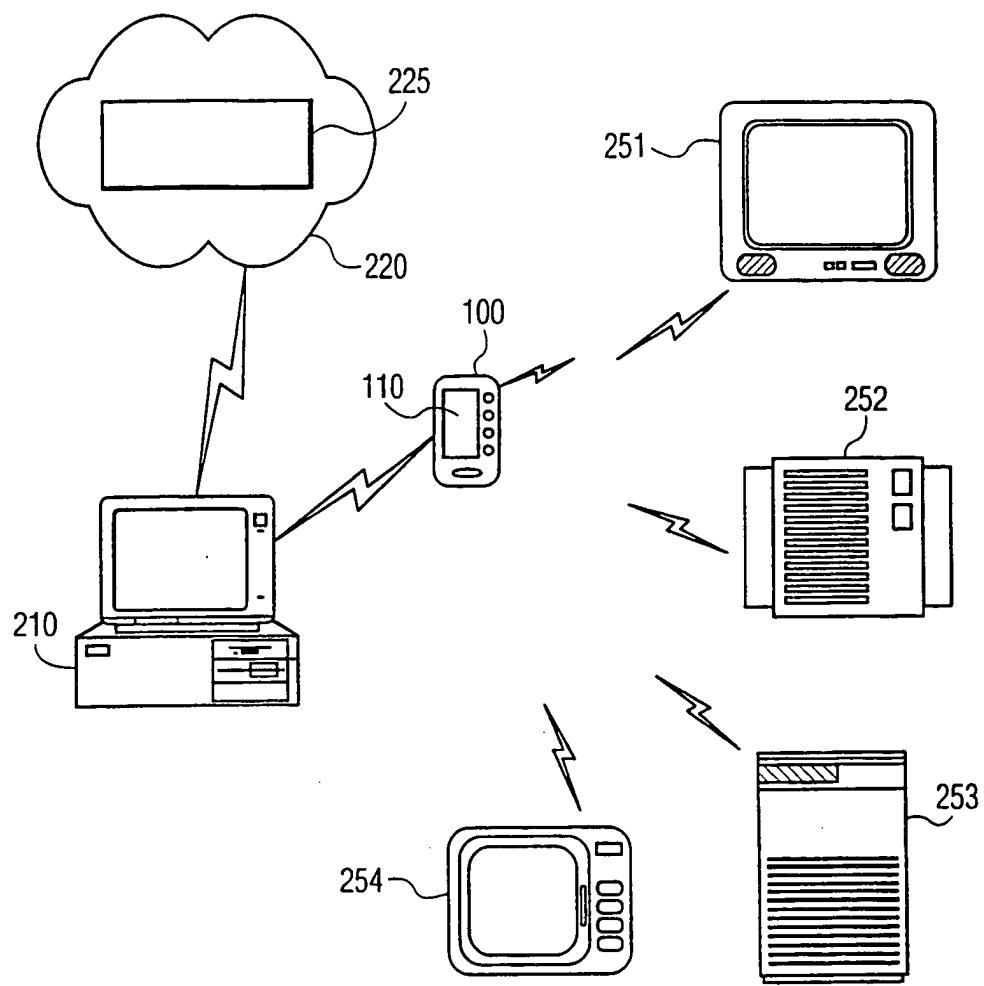


FIG. 2

3/3

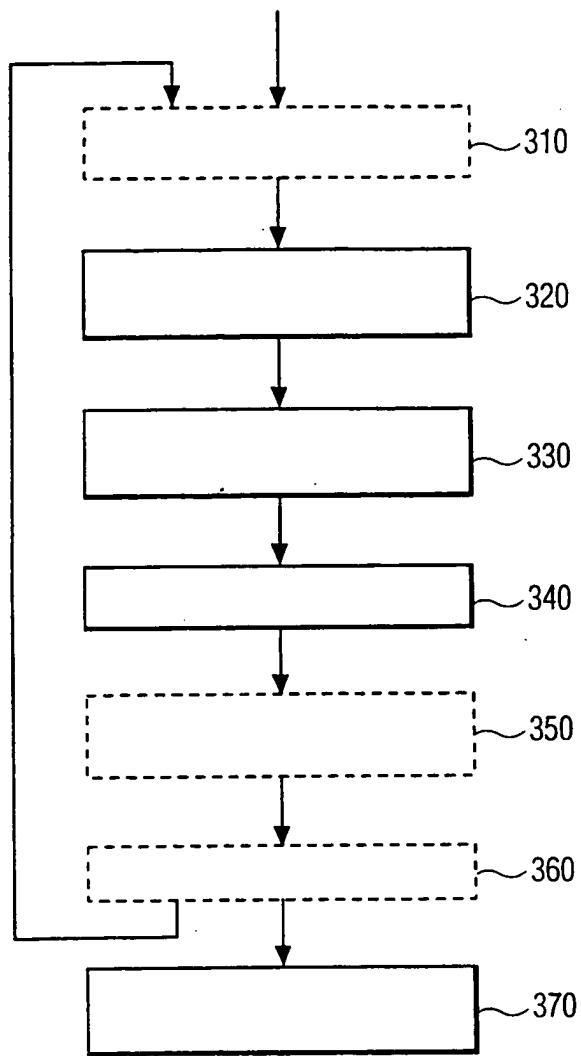


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/06571

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 G06F3/00 G06F3/033 H04B1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 G06F H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 410 326 A (GOLDSTEIN STEVEN W) 25 April 1995 (1995-04-25) column 7, line 4 -column 10, line 10 figures 1,2A-9	1,3-6, 15,16
Y		2,8-12, 17
A		7,13,14
X	EP 0 626 635 A (FIRSTPERSON INC) 30 November 1994 (1994-11-30) column 9, line 18 -column 15, line 16 column 17, line 13-48 column 33, line 39 -column 42, line 3 figures 1A-10,18D-20	1,3-6, 15,16
A		2,7-9, 11,17
		-/-

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the International filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the International filing date but later than the priority date claimed

"T" later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the International search

17 December 1999

Date of mailing of the International search report

11/01/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentstaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax. (+31-70) 340-3016

Authorized officer

Baldan, M

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/EP 99/06571

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 862 304 A (IBM) 2 September 1998 (1998-09-02) column 6, line 30 -column 12, line 38 column 14, line 52 -column 15, line 30 figures 1-3	2,8-12, 17
A	US 5 710 605 A (NELSON RICKY D) 20 January 1998 (1998-01-20) column 4, line 61 -column 7, line 60 figures 1,5,7	15
		1-5,7,8, 15

INTERNATIONAL SEARCH REPORT
 Information on patent family members

national Application No
PCT/EP 99/06571

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 5410326 A	25-04-1995	NONE			
EP 0626635 A	30-11-1994	JP	7098640 A	11-04-1995	
		US	5524195 A	04-06-1996	
		US	5745710 A	28-04-1998	
		US	5886697 A	23-03-1999	
EP 0862304 A	02-09-1998	JP	10240602 A	11-09-1998	
US 5710605 A	20-01-1998	NONE			

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS**
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- FADED TEXT OR DRAWING**
- BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- SKEWED/SLANTED IMAGES**
- COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- GRAY SCALE DOCUMENTS**
- LINES OR MARKS ON ORIGINAL DOCUMENT**
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

